



● **BHS Series**
High rotation speed

- Pneumatic cylinder for very high rotation speed
- Coolant through facility
- Safety valves
- Stroke control predisposition

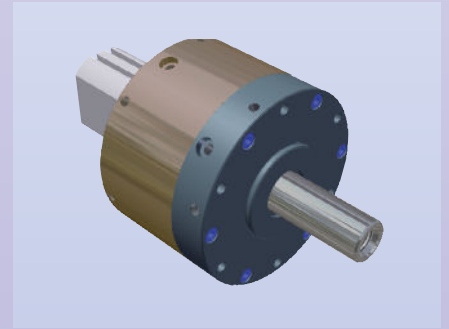

		G33BHS130	G33BHS150	G33BHS200
Piston thrust section	cm ²	120	164	301
Piston tractive section	cm ²	123	167	304
Max speed	rpm	4500	4500	4500
Max pressure	bar	8	8	8
Max thrust force	N	9100	12450	22900
Max tractive section	N	9300	12700	23000
Weight	kg	9	12	17.5

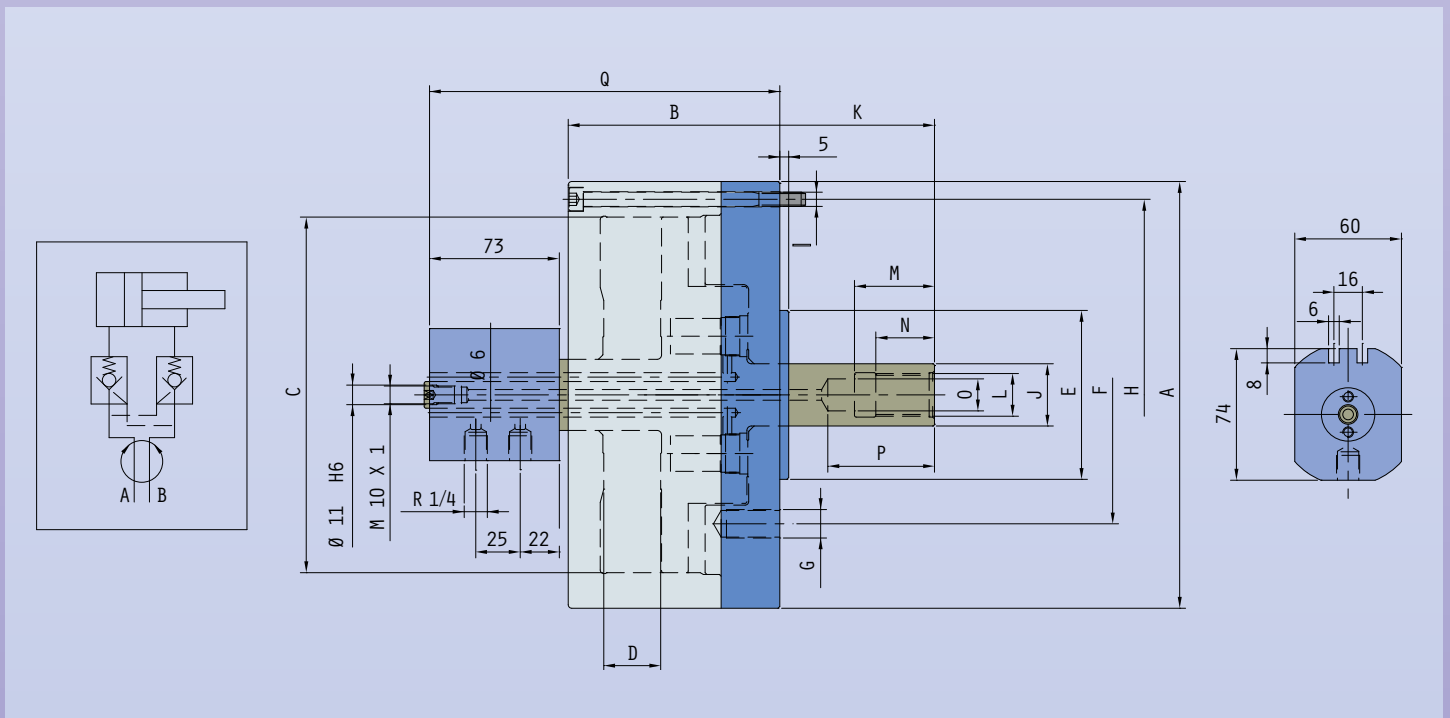

		G33BHS130	G33BHS150	G33BHS200
A	mm	170	190	240
B	mm	119	119	119
C	mm	130	150	200
D (Stroke)	mm	32	32	32
E -0.01/-0.02	mm	80	95	95
F	mm	—	—	145
G	mm	—	—	4x M6
H	mm	150	170	220
I	mm	6x M8	6x M8	6x M8
J	mm	35	35	35
K (Min / Max)	mm	55 / 87	55 / 87	55 / 87
L	mm	M24	M24	M24
M	mm	45	45	45
N	mm	33	33	33
OH8	mm	18	18	18
P	mm	60	60	60
Q (Min / Max)	mm	5 / 37	5 / 37	5 / 37